


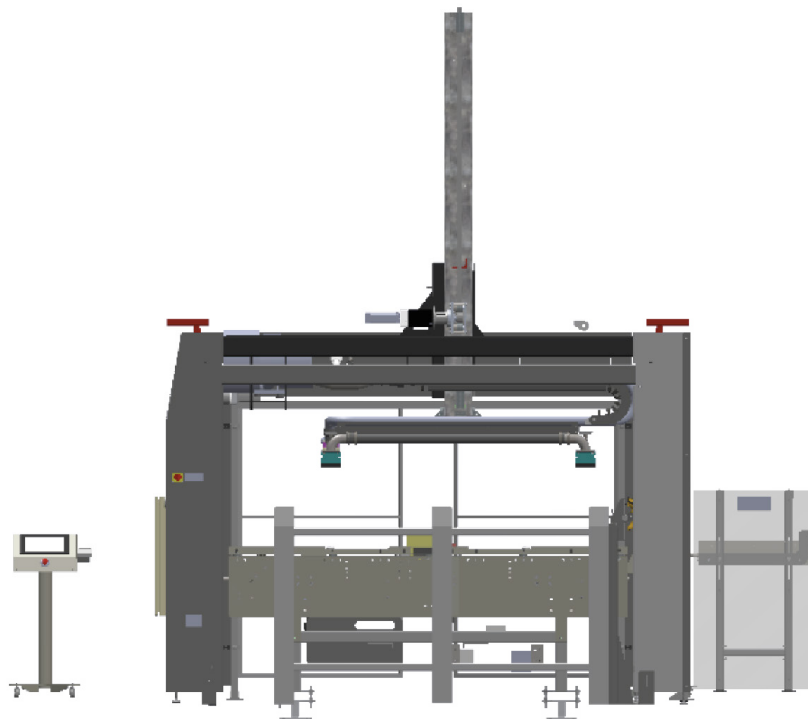

TOOLS

- A - Vacuum lifting system equipped with suction cups
- B - Foam pads

VL-1 KEY FEATURES

- Automatic 2-axis servo control movements for accurate and quick positioning
- Suction foam pads
- User-friendly numerical control software
- Non-marking urethane rollers on conveyors
- Door width automatic reading

FOOTPRINT



MACHINE'S SPECIFICATIONS

MESUREMENTS	HEIGHT	14'11"	455 CM
	LENGHT	12'11"	394 CM
	WIDTH	11'11"	339 CM
	FOOTPRINT	173.76 PI.CA.	13.36 M.CA
	WEIGHT	4 079 LB	1850 KG
ELECTRIC / PNEUMATIC REQUIREMENTS	ELECTRIC POWER	30 KVA	30 KVA
	AIR PRESSURE (PSI)	100	100
	CFM	5 PI ³ /MIN	0.14 M ³ /MIN
ÉLECTRIC (480 VOLTS / 10 AMP)	VOLTAGE	480 V	480 V
	HERTZ	60 HZ	60 HZ
	PHASES	3	3
SCREEN	SIZE	12,1"	30.48 CM
	WEB ACCESS	YES	YES
DOOR CAPACITY	WIDTH	9¾ - 48"	24.77 - 121.92 CM
	LENGHT	UP TO 96"	UP TO 243.84 CM
	DOOR STACK HEIGHT	25 X 1¼"	2.5 X 4.44 CM
HEAD TRAVEL SPEED	X AXIS	500"/MIN	13.8 M / MIN
	Y AXIS	650"/MIN	16.51 M / MIN

WWW.EUGENIEINTERNATIONAL.COM

A technical approval is required for any mesuring outbounding current statistics shown in the specifications board.
It is strictly forbidden to copy the contents of this document partially or entirely.
The manufacturer reserves the right to make any changes to the product.
Please, contact the sales staff for any questions.

MADE IN
CANADA

