


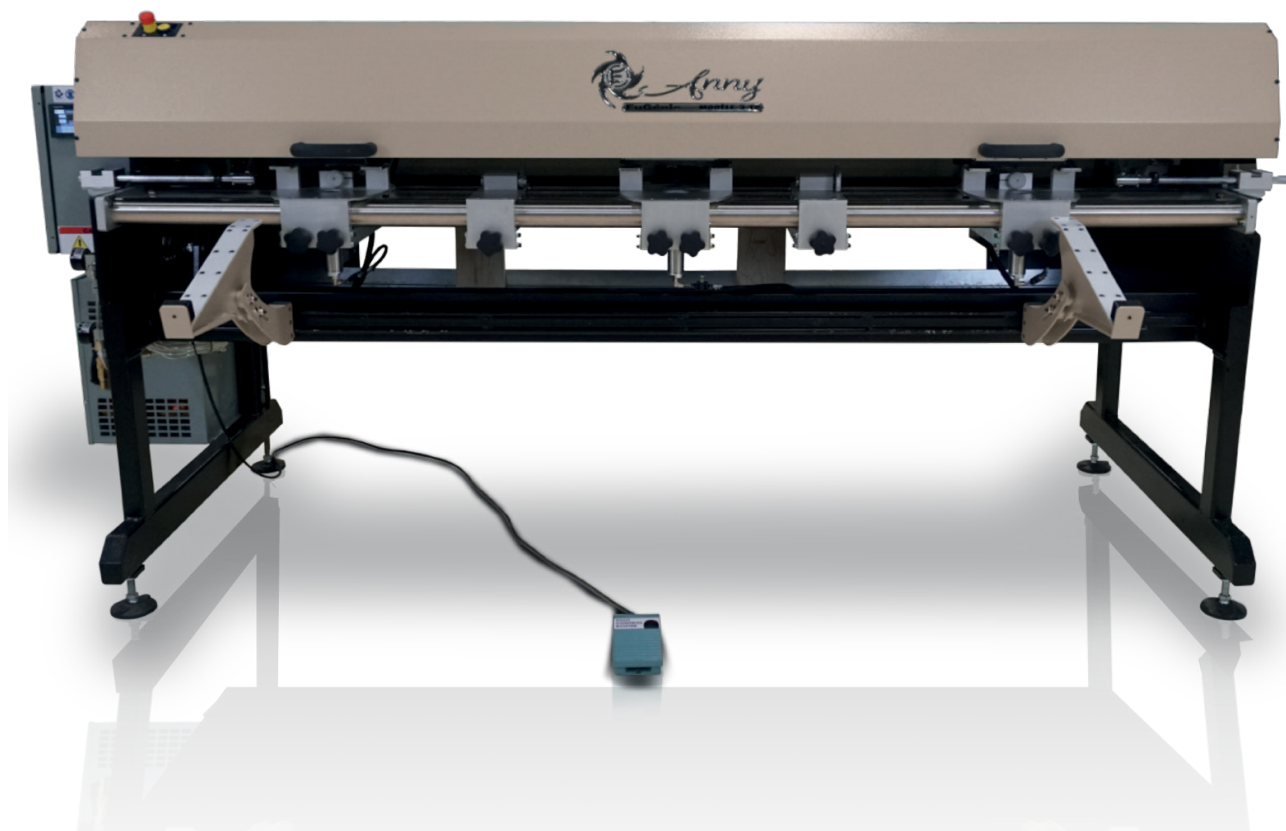

TOOLS

3T-P KEY FEATURES

- 2-axis pneumatic machining center
- 3 machining heads working simultaneously
- Machinable materials: wood and PVC
- Automatic ejection of the jamb
- inclined front support arms
- Touch screen

MACHINE'S SPECIFICATIONS

MEASUREMENTS	HEIGHT	51,27"	1 302,25 MM
	LENGHT	130"	3,302 MM
	WIDTH	59.74"	1 517,3 MM
	FOOTPRINT	55 SQ.FT.	5,10 SQ.CA
	WEIGHT	1 587,33 LB	720 KG
ELECTRICAL / PNEUMATIC REQUIREMENT	ELECTRICAL POWER	6 KVA	6 KVA
	AIR PRESSURE (PSI)	100	100
	CFM	5 ³ FT / MIN	0,141 ³ M / MIN
	ETHERNET CABLE	YES	YES
ELECTRICAL (600 VOLTS/7AMP)	VOLTAGE	600 V	600 V
	HERTZ	60 HZ	60 HZ
	PHASES	3	3
SCREEN	SIZE	3,74 X 4,64"	95,15 X 118 MM
	WEB ACCES	YES	YES
JAMB CAPACITY	LENGHT	3½ TO 12"	88,9 TO 304,8 MM
	WIDTH	UP TO 96"	UP TO 2,4384
	RABBET THICKNESS	1" MAX	26,4 MM
HINGE	HINGE LENGHT	1¼ TO 5¼"	44,45 TO 133,35 MM
	HINGE DEPTH	1½ TO 0,250"	38,1 TO 6,35 MM
	HINGE RADIUS	⁵ / ₈ "	15,875 MM
	HINGE THICKNESS	UP TO ¼"	UP TO 6,35 MM
MACHINING HEAD MOTION	AXE X (WITH TOOL OF ⁵ / ₈ ")	1¼ TO 5¼ / MIN	0,04 TO 0,13 M / MIN

WWW.EUGENIEINTERNATIONAL.COM

A technical approval is required for any mesuring outbounding current statistics shown in the specifications board.
 It is strictly forbidden to copy the contents of this document partially or entirely.
 The manufacturer reserves the right to make any changes to the product.
 Please, contact the sales staff for any questions.

MADE IN
CANADA

